

ISI-BMPIR17MSW

Batten Mount Passive Infra Red (PIR) Occupancy Detector & Photocell



Input: 100-240 Vac 50/60Hz

PLEASE READ THESE INSTRUCTIONS BEFORE INSTALLING THE PRODUCT

NOTE: This product is only compatible to work with ISI enable equipment.

This ISI-BMPIR17MSW module is designed for building into luminaires. Configurable via the free to download Danlers APP on Google Play or Apple APP Store.

INSTALLATION

To be installed by a competent person with reference to BS 7671 or equivalent local standards. If in doubt consult a qualified electrician.

- Plan where the ISI-BMPIR17MSW is to be located (see diagram 1).
- Switch off supply to the lighting batten.
- Remove the 20mm knockout from the end of the lighting batten.
- Remove the 20mm threaded nut from the sensor.
- Feed the trailing wires through the knockout hole, with the sensor facing downwards tighten the 20mm nut (see diagram 2).
- The ISI-BMPIR17MSW device should be connected as shown (see diagram 3).

BROWN Live supply.
BLUE Neutral supply.
WHITE Switch Live.

OPERATION

To check the operation of the ISI-BMPIR17MSW:

- Turn on the supply then after 20 seconds if the sensor has recognised movement of a person within its zone of detection the integral red LED on ISI-BMPIR17MSW will flash. (subject to software version)
- Thereafter, every time movement is detected by ISI-BMPIR17MSW the integral red LED will flash (subject to software version)

The control also features adjustable time out (time lag) control and daylight threshold control which are configured by the APP.

PRECAUTIONS

- Do not place the ISI-BMPIR17MSW near heat sources, fans or in ventilated ceiling voids.
- Do not place close to, or positioned such that, any light source points directly into the ISI-BMPIR17MSW.
- The ISI-BMPIR17MSW should be protected by a suitable fuse.
- Disconnect the ISI-BMPIR17MSW from the circuit before performing insulation testing of the wiring circuit.**





5 YEAR WARRANTY

ISI-BMPIR17MSW comes with a 5 year warranty from the date of manufacture and is CE marked.



TECHNICAL DETAILS

INPUT	
Voltage:	100-240 Vac
Frequency:	50/60Hz
Max. mains current:	20mA
Standby current:	14mA
LOADING	
Fluorescent lamps:	2A (450W)
Incandescent or mains halogen:	2A (450W)
LED lamps and drivers (PF ≥ 0.95):	2A (450W)
RADIO TRANSCEIVER	
Operating frequencies:	2.4... 2,483 GHz
Max. output power:	+4 dBm
LUX PARAMETERS	
Range:	5 - 2000 lux (on face of product)
OPERATING CONDITIONS	
Note: The temperature difference between the detection target and the background must be at least 4 °C.	
Ambient temperature:	-20... +40 °C
Storage temperature:	-25... +75 °C
Max. relative humidity:	0... 80%, non cond.
POWER SUPPLY CONNECTORS	
Wire strip length:	6-7mm
MECHANICAL DATA	
Dimensions:	120mm x 50mm x 36mm
Weight:	95g (unpacked)
Degree of protection:	IP50
Protection class:	Double Insulated
Material (casing)	Flame-retardant polycarbonate/ Polypropylene.
Finish / Colour	Opaque /White (RAL 9003)
CONFORMITY AND STANDARDS	
EMC emission: EN 301 489-1 V2.2.0, EN 301 489-17 V3.1.1, EN 55032: 2015, EN61000-3-2: 2014, EN61000-3-3: 2013	
EMC immunity: EN 301 489-1 V2.2.0, EN 301 489-17 V3.1.1	
Environment: Complies with WEEE and RoHS directives	

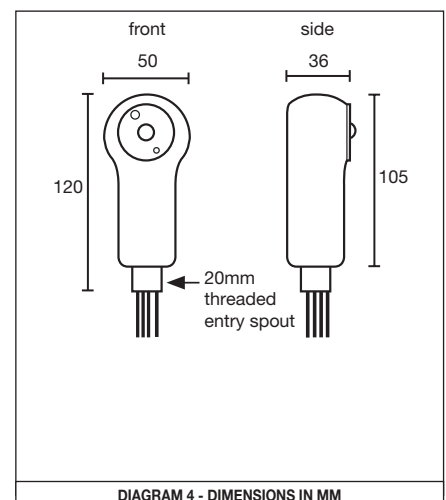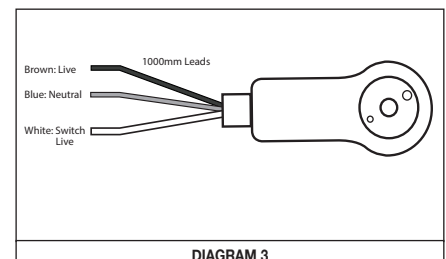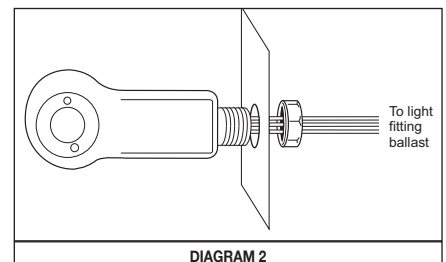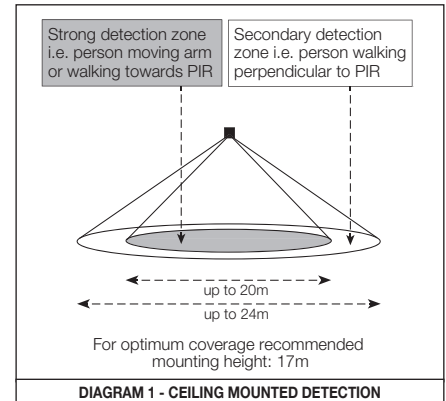

DANLERS Limited, Vincients Road, CHIPPENHAM, Wiltshire, SN14 6NQ, UK.
Telephone: +44 (0)1249 443377 Fax: +44 (0)1249 443388 E-mail: sales@danlers.co.uk
www.danlers.co.uk

Company Registered Number 2570169 VAT Registration Number 543 5491 38

20/04/2023

DANLERS

DAT0224 ISI-BMPIR17MSW