

Mymesh Product Sheet

Connect any light, anywhere.



MYMESH-GRRTEU

Push and Rotary Grid Dimmer suitable for Eurodata plates for use with Mymesh controls

(Input: 100-240 Vac 50/60Hz)

MYMESH-GRRTEU is designed to control the brightness and colour temperature of lighting loads controlled by Mymesh dimmable devices. Configurable via the Mymesh App.

MYMESH-GRRTEU is suitable for Eurodata plates. The control comprises a push-push switch with a rotary control function.

Installation:

To be installed by a competent person with reference to BS 7671 or equivalent local standards. If in doubt consult a qualified electrician.

- Plan where the MYMESH-GRRTEU is to be located. Switch off supply and check for hidden cables and pipes.
- The MYMESH-GRRTEU should be connected as shown in diagrams 1 and 2:
L - Live in. N - Neutral in.
- Wall box depth - 35mm.

Operation:

As configured via the Mymesh App.

Precautions:

- Ensure wires and cables are securely held within the connection terminals.
- Please ensure the most recent edition of the appropriate local wiring regulations are observed and suitable protection is provided e.g. 6 amps over current, 1kV over voltage.
- Disconnect the MYMESH-GRRTEU from the circuit before performing insulation testing of the wiring circuit.

5 YEAR WARRANTY

MYMESH-GRRTEU comes with a 5 year warranty from the date of manufacture and is CE marked.



MYMESH-GRRTEU: Technical Specifications

DIAGRAM 1:
Wiring:





DIAGRAM 2:
Dimensions:

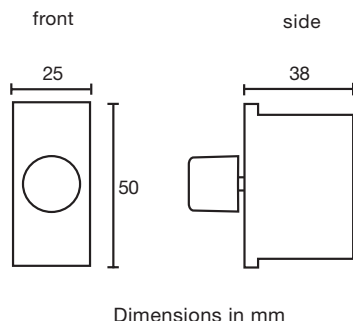

Technical details:

INPUT	
Voltage:	100 - 240Vac
Frequency:	50/60Hz
Max. mains current:	20mA
Standby current:	16mA
RADIO TRANSCEIVER	
Operating frequencies:	2.4... 2.483 GHz
Max. output power:	+4 dBm
OPERATING CONDITIONS	
Ambient temperature:	-20... +50 °C (lout 20mA)
Storage temperature:	-25... +75 °C
Max. relative humidity:	0... 80%, non cond.
CONNECTORS	
Terminal block Wire size:	0.5mm ² - 2.5mm ² solid or stranded
Wire strip length:	6-7mm
Tightening torque:	0.4 Nm/4 Kgf.cm
MECHANICAL DATA	
Dimensions:	50mm x 25mm x 38mm
Weight:	35g (unpacked)
Degree of protection:	IP20
Protection class:	Built-in Class 2
Material (casing)	Flame-retardant polycarbonate
Finish / Colour	Matt /White (RAL 9003)
Protection class:	Built-in Class 2
CONFORMITY AND STANDARDS	
EMC emission: EN60669-2-1:2004 inc. A12:2010	
EMC immunity: EN60669-2-1:2004 inc. A12:2010	
Safety: EN60669-2-1:2004 inc. A12:2010	
Environment: Complies with WEEE and RoHS directives	